


**PRODUCT DESCRIPTION**

The Flat type Figure of 8 Drop cable is designed for use in aerial applications. The optical fibers are placed inside a single gel-filled tube and sheathed with an outer jacket in figure of 8 form. Dielectric strength members (FRP/ARP rod) placed 180° apart, provide the necessary longitudinal strength and a steel wire/FRP rod as messenger also serves as an additional strength member.

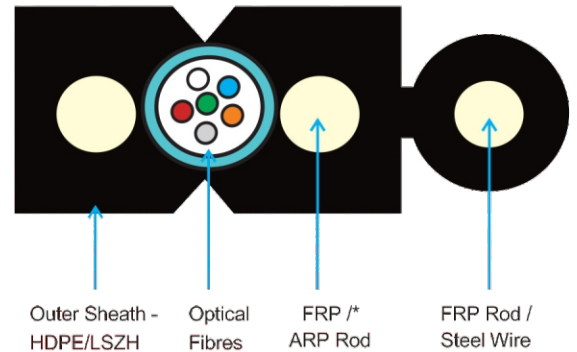

**APPLICATIONS**

- FTTX
- Aerial
- Local loop
- Broadband network

**SPECIFICATIONS**

Fibre Count	Available from 2F to 12F
Standards Compliance	Telecordia GR-20, IEC 60794, EIA/TIA, ITU-T, EN187000, RUS1755.900

**FEATURES**

- Multiple Fibre types including bend resistant
- Strength members available in metallic also

**ENVIRONMENTAL SPECIFICATIONS (TEMPERATURE)**

Operation / Storage	-30 to +70 Degree Celsius
Installation	-25 to +75 Degree Celsius

**ADVANTAGES**

- Easy Drop
- Multiple network applications
- Reduces cable preparation and installation time
- Reduces cost
- Easy Installation

FIBRE COUNT	DIAMETER (mm) Nominal	WEIGHT (Kg./Km) Nominal	TENSILE STRENGTH (N)		CRUSH RESISTANCE (N/10cm)	BENDING RADIUS (mm)	
			Installation	Operation		Temporary	Permanent
2-6	6.8 x 3.0	23	1200	600	1000	60	120
8-12	7.0 x 3.0	25	1200	600	1000	60	120