

Siechem


Wires & Cables

Uni - Tube Design (Mini)

SPECIFICATIONS

Fibre Count	Available from 2F to 4F
Standards Compliance	Telecordia GR-20, IEC 60794, EIA/TIA, ITU-T, EN187000, RUS1755.900

Outer Sheath Nylon - 12
Soft Inner Tube
Optical Fibres
Rip Cord
Aramid strength member

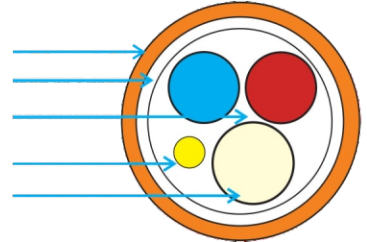

ENVIRONMENTAL SPECIFICATIONS (TEMPERATURE)

Operation / Storage	-40 to +70 Degree Celsius
Installation	-30 to +60 Degree Celsius

FIBRE COUNT	DIAMETER (mm) Nominal	WEIGHT (Kg./Km) Nominal	TENSILE STRENGTH (N)		CRUSH RESISTANCE (N/10cm)	BENDING RADIUS (mm)	
			Installation	Operation		Temporary	Permanent
2	1.7	2.3	40	20	100	40	60
4	1.9	2.7	40	20	100	40	60