



LFMKK

Application

- Designed for radio and radar units.
- Used to install above and below the decks.

Features

- Flame retardant


Product Construction

- Conductor : Stranded copper conductor.
- Insulation : PVC
- Polyamide Protective covering
- Four cores formed into a star-quad, two diagonally opposite cores make up a telecommunications pair, star-quads laid up concentrically.
- Inner Sheath : PVC
- Screening : Plain copper wire braided
- Outer Sheath : Heat Resistant PVC

Technical Data

- Temperature Range : - 40°C to +70°C

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE
IRS 	REACH 	RoHS 	Lloyd's Register 	ABS

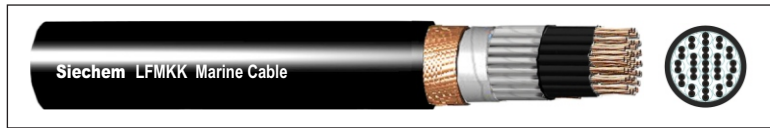

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
341 08 02	2 x 2 x 0.75	10.9	26	110
341 08 04	4 x 2 x 0.75	12.7	52	165
341 08 06	6 x 2 x 0.75	15.1	78	226
341 08 08	8 x 2 x 0.75	16.6	103	280
341 08 10	10 x 2 x 0.75	19.3	129	344
341 08 14	14 x 2 x 0.75	21.1	181	445

