



LMGSG

Application

- For fixed installation on marine craft above and below deck.

Product Construction

- Conductor : Stranded copper conductor.
- Insulation : Heat Resistant EPR
- Laying up : Core stranded in layers with optimal lay-length
- Separator Tape : Flame resistant Foil
- Screening : Plain copper braided
- Separator Tape : Polyester foil
- Outer Sheath : Chloroprene


Technical Data

- Temperature Range : - 40°C to +85°C

Features

- Flame retardant
- Halogen free

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE
IRS	REACH COMPLIANT	RoHS COMPLIANT	Lloyd's Register	ABS

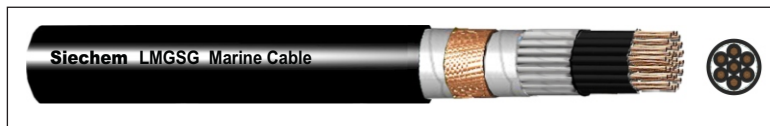

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
343 13 02	2C X 1.5	9.5	26	131
343 13 03	3C X 1.5	9.9	39	152
343 13 04	4C X 1.5	10.8	52	189
343 13 05	5C X 1.5	11.6	65	219
343 13 07	7C X 1.5	12.8	91	277
343 13 10	10C X 1.5	15.5	131	376
343 13 12	12C X 1.5	15.9	157	417
343 13 14	14C X 1.5	16.6	183	463
343 13 16	16C X 1.5	17.4	209	512
343 13 19	19C X 1.5	18.2	248	578
343 13 24	24C X 1.5	19.6	313	689
343 13 27	27C X 1.5	21.3	353	780
343 13 33	33C X 1.5	22.8	431	913
343 16 02	2C X 2.5	10.7	44	177
343 16 03	3C X 2.5	11.2	65	210
343 16 04	4C X 2.5	12.0	87	250
343 16 07	7C X 2.5	14.3	152	373

