



LMKK

Application

- For fixed installation on marine craft above and below deck.

Product Construction

- Conductor : Stranded copper conductor.
- Insulation : PVC with Polyamide
- Protective coating
- Laying up : Core stranded in layers with optimal lay-length
- Inner Sheath : PVC
- Screening : Waterproofed plain copper braided
- Outer Sheath : PVC


Technical Data

- Temperature Range : - 40°C to +85°C

Features

- Flame retardant

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE
IRS	REACH COMPLIANT	RoHS COMPLIANT	Lloyd's Register	ABS

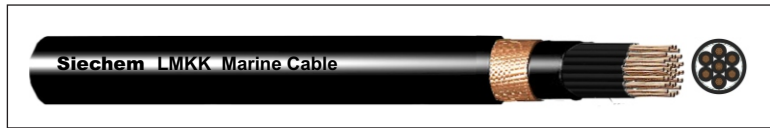

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
342 13 02	2C X 1.5	9.8	26	130
342 13 03	3C X 1.5	10.2	39	154
342 13 04	4C X 1.5	11.0	52	183
342 13 05	5C X 1.5	11.7	65	211
342 13 07	7C X 1.5	12.6	90	260
342 13 10	10C X 1.5	15.4	129	352
342 13 12	12C X 1.5	15.8	155	396
342 13 14	14C X 1.5	16.5	181	442
342 13 16	16C X 1.5	17.3	207	491
342 13 19	19C X 1.5	18.2	246	558
342 13 24	24C X 1.5	19.5	310	671
342 13 27	27C X 1.5	21.4	349	751
342 13 33	33C X 1.5	22.9	426	885
342 16 02	2C X 2.5	9.6	43	128
342 16 03	3C X 2.5	10.1	65	160
342 16 04	4C X 2.5	10.9	86	195

