



MYY - J

Application

- Fixed installations in communication, radio, control and data processing facilities on ships.

Product Construction

- Conductor : Electrolytic, stranded, annealed copper wire.
- Insulation : PVC
- Outer Sheath : PVC


Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U₀/U) : 60 V
- Test Voltage : 1500 V

Features

- Flame retardant
- Smoke density
- Gases corrosivity
- Gases toxicity
- Electro magnetic interference resistance.

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE

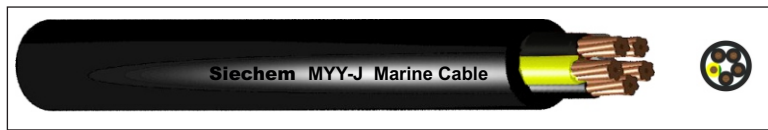

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
337 13 03G	3G1.5	9.3	39	123
337 13 04G	4G1.5	10.0	52	152
337 13 05G	5G1.5	11.1	65	186
337 16 03G	3G2.5	11.0	65	181
337 16 04G	4G2.5	11.9	87	225

