



MYY - O

Application

- Fixed installations in communication, radio, control and data processing facilities on ships.

Product Construction

- Conductor : Electrolytic, stranded, annealed copper wire.
- Insulation : PVC
- Outer Sheath : PVC


Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U₀/U) : 60 V
- Test Voltage : 1500 V

Features

- Flame retardant
- Smoke density
- Gases corrosivity
- Gases toxicity
- Electro magnetic interference resistance.

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE
IRS 	REACH 	RoHS 	Lloyd's Register 	ABS

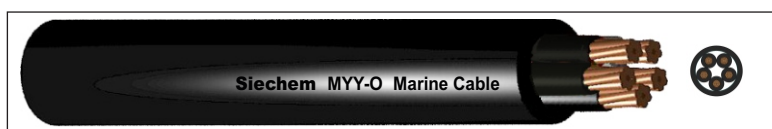

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
338 13 02	2C x 1.5	9.0	26	110
338 13 03	3C x 1.5	9.5	39	123
338 13 04	4C x 1.5	10.0	52	152
338 13 05	5C x 1.5	11.0	65	186
338 16 03	3C x 2.5	11.0	65	181
338 16 04	4C x 2.5	12.0	87	225

