



RFA-HF

Application

- Fixed installations on ships
- (EMC) Minimizes radio interferences and electrical influences

Features

- Flame retardant : IEC - 60332-1-2
- Halogen free : IEC 60754 series
- Smoke emission : IEC 61034 series


Product Construction

- Conductor : Electrolytic, stranded, annealed copper conductor IEC 60228 Class 2
- Insulation : Cross Linked Polyethylene
- Separator : Separator tape
- Screen : Drain wire tinned copper & aluminium polyester copper tape, coverage 100%
- Outer Sheath : Cross Linked Polyolefin, Standard colour Grey, Other colours on request

Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U₀/U) : 150/250V (300 V)

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE

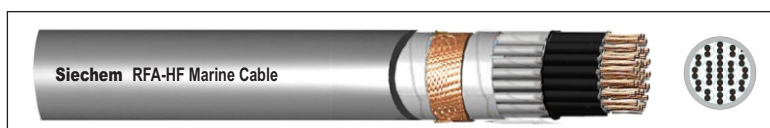

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
325 06 01	1 x 2 x 0.5	7.06	8.71	63
326 06 01	1 x 4 x 0.5	8.15	17.41	87
325 06 02	2 x 2 x 0.5	10.19	17.41	107
325 06 04	4 x 2 x 0.5	11.65	34.82	149
325 06 07	7 x 2 x 0.5	13.88	60.94	217
325 06 08	8 x 2 x 0.5	15.65	69.64	253
325 06 10	10 x 2 x 0.5	17.77	87.05	309
325 06 12	12 x 2 x 0.5	18.53	104.46	353
325 06 14	14 x 2 x 0.5	19.41	121.87	391
325 06 19	19 x 2 x 0.5	21.67	165.40	496
325 06 24	24 x 2 x 0.5	25.56	208.92	632
325 06 37	37 x 2 x 0.5	29.25	322.09	877
325 08 01	1 x 2 x 0.75	8.22	13.06	79
326 08 01	1 x 4 x 0.75	9.56	26.12	115
325 08 02	2 x 2 x 0.75	12.09	26.12	140
325 08 04	4 x 2 x 0.75	13.96	52.23	202
325 08 07	7 x 2 x 0.75	16.73	91.40	301
325 08 08	8 x 2 x 0.75	18.93	104.46	351
325 08 10	10 x 2 x 0.75	21.58	130.58	430
325 08 12	12 x 2 x 0.75	22.49	156.69	494
325 08 14	14 x 2 x 0.75	23.60	182.81	551
325 08 19	19 x 2 x 0.75	26.42	248.10	706
325 08 24	24 x 2 x 0.75	31.27	313.38	898

