



RFA-FRHF(I)

Application

- Fixed installations on ships
- (EMC) Minimizes radio interferences and electrical influences

Features






- Flame retardant : IEC - 60332-1-2
- Fire resistant : IEC 60331-21
- Halogen free : IEC 60754 series
- Smoke emission : IEC 61034 series


Product Construction

- Conductor : Electrolytic, stranded, annealed copper wire IEC 60228 Class 2
- Insulation : Mica tape & Cross Linked Polyethylene
- Pair Screen : Plastic coated aluminium tape & a tinned copper drainwire
- Bedding : Separator tape
- Collective Screen : Drain wire tinned copper and Aluminium polyester tape coverage 100%
- Outer Sheath : Cross Linked Polyolefin, Standard colour Orange, Other colours on request.

Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U₀/U) : 150/250V (300V)

ISO 9001 	ISO 14001 	AS 9100 	ISO 45001 	CE 
--	---	---	---	--

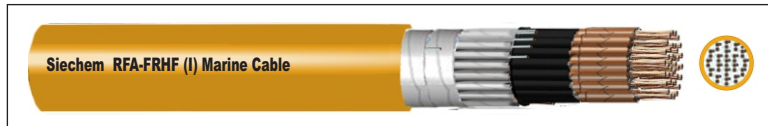

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
333 08 02	2 x 2 x 0.75	12.45	26.12	150
333 08 04	4 x 2 x 0.75	14.35	52.23	216
333 08 07	7 x 2 x 0.75	17.18	91.40	321
333 08 08	8 x 2 x 0.75	19.22	104.46	365
333 08 10	10 x 2 x 0.75	22.11	130.58	458
333 08 12	12 x 2 x 0.75	22.83	156.69	515
333 08 14	14 x 2 x 0.75	24.16	182.81	587
333 08 19	19 x 2 x 0.75	27.03	248.10	752
333 08 24	24 x 2 x 0.75	31.96	313.38	956

