



RFE-FRHF

Application

- Fixed installations on ships
- (EMC) Minimizes radio interferences and electrical influences

Features

- Flame retardant : IEC - 60332-1-2
- Fire resistant : IEC 60331-21
- Halogen free : IEC 60754 series
- Smoke emission : IEC 61034 series


Product Construction

- Conductor : Electrolytic, stranded, annealed copper wire. IEC 60228 Class 2
- Insulation : Mica tape & Cross Linked Polyethylene
- Bedding : Filler tape
- Armour : drain wire (in all sizes) & copper wire braid, coverage > 90%
- Sheath : Cross Linked Polyolefin, Standard colour Orange, Other colours on request

Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U₀/U) : 150/250 V (300V)

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE

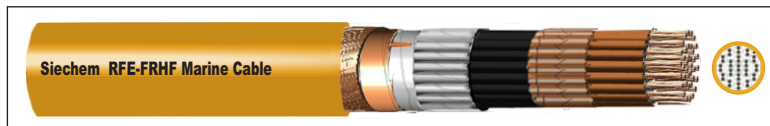

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
328 08 01	1 x 2 x 0.75	9.02	13.06	100
329 08 01	1 x 4 x 0.75	10.36	26.12	141
328 08 02	2 x 2 x 0.75	13.19	26.12	188
328 08 02	4 x 2 x 0.75	15.56	52.23	293
328 08 02	7 x 2 x 0.75	18.33	91.40	412
328 08 02	8 x 2 x 0.75	20.33	104.46	468
328 08 02	10 x 2 x 0.75	23.18	130.58	576
328 08 02	12 x 2 x 0.75	23.89	156.69	634
328 08 02	14 x 2 x 0.75	25.20	182.81	711
328 08 02	19 x 2 x 0.75	28.02	248.10	886
328 08 02	24 x 2 x 0.75	32.87	313.38	1113
328 13 XX	1 x 2 x 1.5	9.98	26.12	126
329 13 XX	1 x 4 x 1.5	11.52	52.23	185
328 13 02	2 x 2 x 1.5	15.26	52.23	274
328 13 04	4 x 2 x 1.5	17.46	104.46	386
328 13 07	7 x 2 x 1.5	20.69	182.81	560
328 13 08	8 x 2 x 1.5	23.05	208.92	637
328 13 10	10 x 2 x 1.5	26.33	261.15	787
328 13 12	12 x 2 x 1.5	27.16	313.38	878
328 13 14	14 x 2 x 1.5	28.67	365.61	991
328 13 19	19 x 2 x 1.5	31.96	496.19	1254

