



SY

Application

- Suited for use in Control units, production lines, communication systems, conveyor belts, ship building.
- Used for fixed or mobile installation in dry, damp or wet areas.

Product Construction

- Conductor : Fine wire stranded, plain copper conductor
- Insulation : PVC
- Screening : Tinned Steel-wire braided
- Outer Sheath : PVC


Technical Data

- Temperature Range : - 40°C to +120°C
- Rated Voltage (U_i/U) : 60 V
- Test Voltage : 1500 V

Features

- Flame retardant
- Smoke density
- Gases corrosivity
- Gases toxicity
- Electro magnetic interference resistance.

ISO 9001	ISO 14001	AS 9100	ISO 45001	CE
IRS 	REACH 	RoHS 	Lloyd's Register 	ABS

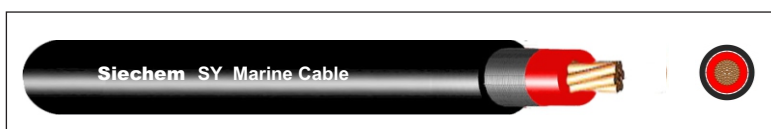

Part Number	Number of Cores and mm ² Per Conductor	Outer Diameter in mm approx.	Copper Index Kg/Km	Total Weight Kg/Km approx.
339 23 XX	1C X 6	8.5	51	139
339 27 XX	1C X 10	10.4	85	212
339 28 XX	1C X 16	11.9	132	290
339 30 XX	1C X 25	13.6	207	403
339 32 XX	1C X 35	15.0	289	516
339 34 XX	1C X 50	18.0	413	731
339 37 XX	1 x 70	21.0	579	996
339 38 XX	1 x 95	22.8	785	1250

