



Siechem UL 2598 APC, PVC Insulated 60°C, 300 V AC Cable

Application

- ✓ Appliance wiring
- ✓ Internal wiring of meters, panels, electrical and electronic equipment.

Features


- ✓ Flame retardant
- ✓ Resistant to water, oil, acids, solvents and fungus.

Product Construction

- ✓ Conductor : Annealed Solid / Stranded Bare Copper (Tinning on request)
- ✓ Insulation : PVC
- ✓ Optional Shield, covering
- ✓ Jacket : PVC
- ✓ Colour : As per customer order.

Technical Data

- ✓ Temperature Range : +60°C
- ✓ Voltage Rating : 300 V AC

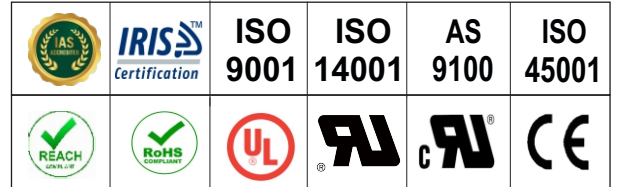

Part Number	Conductor Construction		Insulation Wall Thickness Nom.	Outer Sheath Thickness Nom.	Cable		Max. Conductor Resistance at 20°C
	Conductor Size	No. of Strands / Wire dia			Overall Diameter Max.	Weight Approx.	
	AWG	nos. / mm	mm	mm	mm	kg/km	Ω/km
4328102	18	19/0.234	0.43	0.80	6.80	77.30	21.8
4328102	18	19/0.234	0.43	0.84	7.48	98.91	21.8
4328102	18	19/0.234	0.43	0.94	8.33	125.00	21.8
4328102	18	19/0.234	0.43	0.94	10.05	166.79	21.8
4328102	18	19/0.234	0.43	1.02	10.98	211.17	21.8
4328102	18	19/0.234	0.43	1.14	12.38	265.75	21.8
4328102	18	19/0.234	0.43	1.14	13.03	315.87	21.8
4328102	18	19/0.234	0.43	1.52	15.94	443.30	21.8
4327802	12	19/0.47	0.8	0.80	9.61	118.06	5.43
4327802	12	19/0.47	0.8	0.80	11.29	208.92	5.43

